

JSP46SP

GE® 30" Slide-In CleanDesign Electric Range

Dimensions and Installation Information (in inches)

KW Rating	
240V	12.4
208V	9.3

Note: Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least 194° temperature rating.

Note: To reduce the possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

Receptacle Locations: For all 30" Slide-In Ranges locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Optional Kits For Slide-In Electric Ranges

(Available At Additional Cost)

Accessory Backguards

(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)

JXS32SS (Stainless) - 4" High

JXS32BB (Black) - 4" High

JXS37BB (Black) - 5-1/4" High

Body Sides

(Slide-in ranges are sold without sides installed. Can be installed on either left or right when unit has one exposed side [no cabinet adjacent]. Kit contains 1 body side)

JXS77BB (Black)

Rear Filler Strip


WB07T10680 - Black Filler Strip Assembly

Optional Lower Trim Kits


(If counter height is greater than 36.5", a lower trim kit is recommended to extend the useful height to 38" maximum)

JXS56BB - Black

If you are NOT using the optional Filler or Backguard:





If you are using the optional Filler or Backguard:



For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



imagination at work

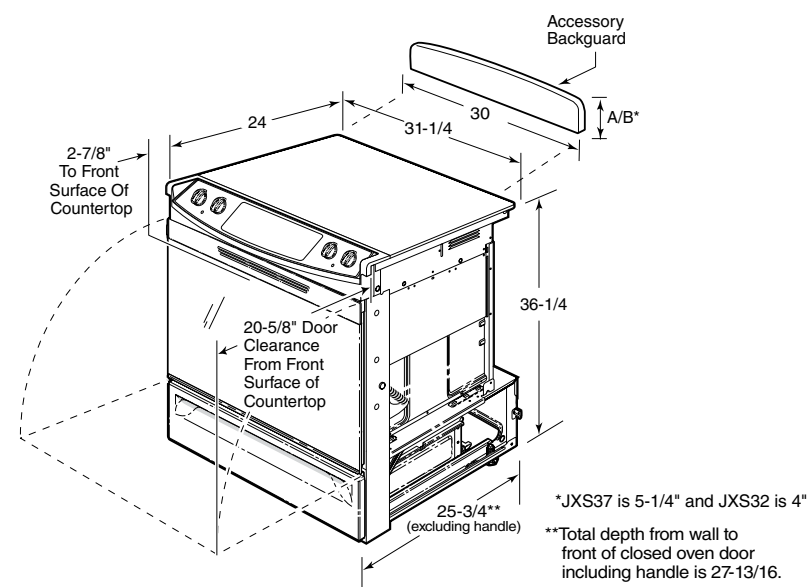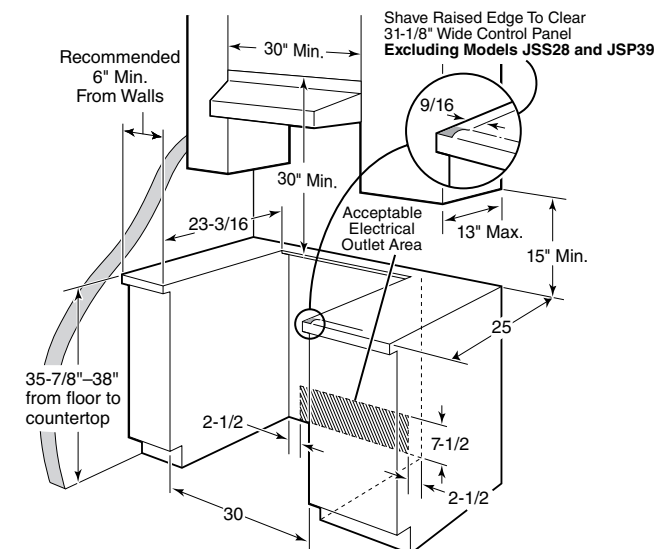

Dimension and installation information are shown in inches.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories

Specification Revised 7/09


320650

JSP46SP

GE® 30" Slide-In CleanDesign Electric Range

Features and Benefits

- Self-clean Oven - Self-clean allows you to spare yourself from the trouble and effort it takes to scrub the oven interior. The oven does all the work!
- PreciseAir™ Convection System - A reversing fan circulates heat and air for evenly browned and baked foods
- Electronic Oven Controls - Electronic pads on the control panel are easy to operate with just a touch
- Glass Touch Controls - Smooth controls are easy to use and add a sophisticated style to the kitchen
- PowerBoil™ Element - Accommodates various-size pots or pans and 3,000 watts of power speeds the boiling process
- Bridge Element - Combines three cooktop elements into one large cooking area, ideal for griddles and gourmet pans
- Extra-large Oven Capacity - Remarkably large oven interior is ideal for holidays, dinner parties and everyday family cooking
- Two Oven Racks - Includes two oven rack that are sturdy and reliable
- Ribbon Heating Elements - Powerful heat beneath the smooth surface provides high-speed warm-up and even heating
- Big Hearth Window - Elegant shaped window makes it easy to monitor the progress of food
- Frameless Glass Oven Door - Simple and stylish frameless glass door creates an elegant look that blends into cabinetry, and is easy to wipe clean
- Model JSP46SPSS - Stainless steel

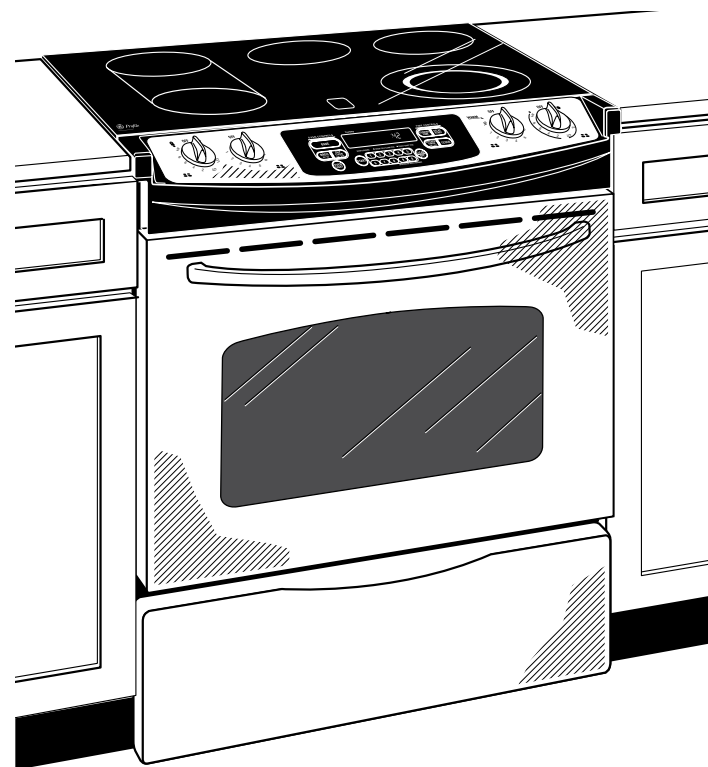

imagination at work

Specification Revised 7/09

320650